
Panel-Loc Plus™ Installation Details

HELPFUL INFORMATION FOR RESIDENTIAL ROOFING



INCLUDES REGIONAL PRODUCTS

Panel-Loc™ CD 2000°

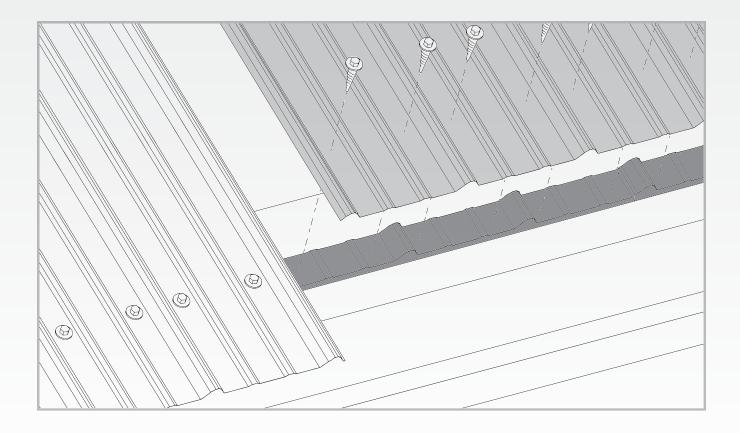

We promise to improve your business by accurately providing quality products right when you need them. Every time.

Visit our website for more product information, testing, installation guides, energy ratings, warranties, photo gallery, color visualizer, and more.

centralstatesmfg.com

Important Information, Tools	4
Safety	5
Care and Handling	5
Field Cutting, Drilling, Fastening	6
Fastener Spacing	7
Roof Preparation	8-9
Substructure Squareness	10-11
Installation Overview	12-13
Installing the First Panel	14-15
Installing Sidelap Panel	16
Installing Endlap Panel	17
Residential Fascia Trim	18-19
Residential Drip Edge	20-21
Residential Eave Trim	22-23
Valley Trim	24-25
Gambrel Trim Lower	26-27
Gambrel Trim Upper	28-29
Residential Rake Trim	30-31
Ridge Cap	32-33
Sidewall Trim	
Endwall Flashing	36-37

NOTICE: This document illustrates conditions and details that are recommended for this product to minimize the number of potential water penetrations. Each project may have specific situations in which alternate methods may be acceptable. A qualified contractor is able to adapt methods to a particular project.

IMPORTANT INFORMATION

This manual contains suggestions and guidelines on how to install Panel-Loc Plus panels. The drawings in this guide are for illustration purposes only and may not apply to all building designs or product applications. The installation details shown are proven methods of construction, but are not intended to cover all instances, building requirements, designs, or codes. It is the responsibility of the designer/installer to ensure that the details meet particular building requirements. The designer/installer must be aware of, and allow for, expansion/ contraction of roof panels. The details may require changes or revisions due to each project's conditions.

There are certain minimum live, snow, dead, collateral, and wind loads that a roof must generally be designed to support. Consult local building officials to determine the appropriate building design load requirements. A professional engineer should be consulted for all roof system

designs. It is the buyer's responsibility to verify all applicable code requirements, check all measurements, and determine suitability of product for the job. The buyer is also responsible for determining lengths and quantities needed. Prior to ordering and installing materials, all dimensions should be verified with field measurements. Implied warranties of merchantability and fitness for a particular purpose are disclaimed. All Panel-Loc Plus instructions assume that a

qualified firm or individual has been contacted regarding application of this product. Failure to comply with stated recommendations relieves the manufacturer of responsibility for any damage or deterioration of the product incurred and voids any applicable warranty.

Central States Manufacturing reserves the right to modify, without notice, information in this guide. If you have questions regarding proper installation of Panel-Loc Plus or information not included in this guide, contact your salesperson.



Installation details shown also apply to Panel-Loc and CD2000 profiles. Follow the fastener spacing listed in their product guides at centralstatesmfg.com.

TOOLS & EQUIPMENT

- Gloves
- Safety Glasses
- · Snips/hand shear
- Tape Measure
- Chalk Line

- Electric Metal Shear
- Cordless Drill
- Caulking Gun
- Blind Rivet Tool

CARE AND HANDLING

SAFETY

Each job site presents different hazards; therefore it is the responsibility of the contractor to determine the safest way to install Panel-Loc Plus based on the recommended instructions contained in this guide and provide crew members with appropriate safety measures. If you must walk on a metal roof, take great care. Metal panels can become slippery, so always wear shoes

with non-slip soles. Avoid working on metal roofs during wet conditions, when the panels can become extremely slippery. Walking or standing on a metal roof which does not have a plywood or other deck beneath it is not recommended. However, if you must do so, always walk on the purlins, never between.

OSHA safety regulations should be complied with at all times.

Always wear heavy gloves when working with steel panels to avoid cuts from sharp edges. If power cutting or drilling steel panels, always wear safety glasses to prevent eye injury from flying metal fragments.



RECEIVING MATERIALS

When unloading panels, extreme caution must be employed. Care needs to be used when unloading panels with a forklift. Panel edges and underside paint may become damaged if the forklift driver does not use caution.

STORAGE

All materials should be stored in a dry place, preferably under a roof. Panels and trim are subject to staining and premature rusting when water sits upon, or becomes trapped between them. You may stand panels on end and fan them out at the bottom to provide air circulation and moisture run off. If space does not allow for this, the panels should be separated, blocked off the ground at least 12 inches to allow air flow and stored at an incline to encourage drainage. The panels should then be covered in a manner to still allow airflow through the sheets. Do not use a plastic cover, as this may cause the panels to sweat or condensation to occur. Failure to properly store panels and trim could result in product failure that is not covered by manufacturers warranty.

HANDLING

When unbundling the panels, never drag them across the surface of one another. This may cause scratches across the underneath panels. It is recommended that the panels be "rolled" off the top of the bundle to prevent scratching. Panels should only be lifted and carried by their sides. Panel edges are very sharp, therefore, safety equipment should be worn by all workers handling the material.

Remove the protective strippable film from trim prior to installation. The longer strippable is left on the material, the harder it will be to remove.

FOOT TRAFFIC

Care of metal panels and flashings must be exercised throughout installation. Foot traffic can cause distortion of panel and damage to finish. Traffic over the installed roof must be kept to an absolute minimum.

If walking on the roof panels is unavoidable, walk only on the minor ribs to minimize damage.

Strippable film on Textured panels and trim must be removed within 30 days of manufacture date. Strippable that is left on for more than 30 days may be hard to peel off and is not a reason for a refund or replacement from the manufacturer.



CUTTING AND DRILLING

FIELD CUTTING

Central States recommends tin snips/hand shears, electric nibblers or a profile shear to cut metal panels and trim. All product surfaces should be free of debris at all times. Installed surfaces should be wiped clean at the end of each work period. Never cut panels over metal surfaces. When cutting metal panels, always wear heavy gloves to avoid cuts from sharp edges and safety glasses to prevent eye injury.

Central States discourages the use of a power saw that may generate hot metal shavings. Hot shavings can stick to the painted surface. If loose shavings are not removed from the panel surface immediately they will begin to corrode and shorten the life of the product. One method of preventing this problem is to flip the panel over when cutting and only cut

one panel at a time. This allows you to brush shavings off of the back of the panel and helps to avoid damaging the painted finish. Make sure that stacks of panels are away from the cutting area so shavings do not blow onto other panels.

DRILLING

Always use a cover sheet underneath your panel if you are predrilling fastener holes. Do not predrill more than one panel at a time. Predrilling multiple panels can cause shavings to become embedded in interior panels. Brush away any loose shavings immediately.



Shavings created by saw cutting or drilling may cause the panel to rust and could result in product failure that is not covered by manufacturers warranty.

FASTENING

Fastener length will be determined by the substrate under the panel. Use a fastener with washer and drive it into the flats of the panel at every purlin or 9" on center, based on the fastener spacings shown on page 7.

The fastener's washer should be compressed firmly against the metal, but not overdriven which can cause leakage. If a fastener misses a purlin, remove it and use caulk or a stitch screw to fill the hole.










Overdriven fasteners can cause the washer to fail and leak or a dimple in the panel which can collect water and cause rust.


FASTENER SPACING

Follow the suggested fastener patterns below for interior or panel termination. Screws may be placed in either the flat or the rib. In the overlap condition, avoid using fasteners in the major rib as this may damage the siphon groove.

Fastener pattern at panel termination (Eave, endlap, valley)




Fastener pattern at interior of panel



SIPHON GROOVE


Panel-Loc Plus has two vertical edges, the overlap and the sidelap. The sidelap edge has a specific bend in the last major rib, called a siphon groove. When the overlap edge is installed on top of the sidelap edge, it creates an air gap that prevents water from wicking under the panel. Panels should be installed with the overlap facing away from the prevailing wind.

Do not damage the siphon groove by using a stitch screw on top of the major rib or clog it with butyl tape.

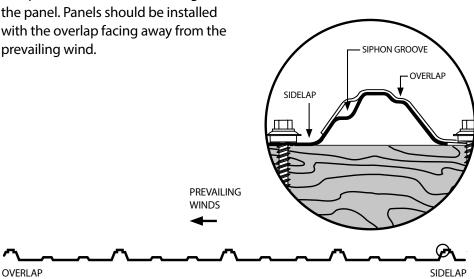

ROOF PREPARATION

, Plus can pe installed over e. shingle istortion in the panel caused by an uneven over solid decking or ow ming. ubstrate, ripg r laps in the vapor barrier, ahric protru ails and staples, button cap It is the responsibility of the contractor to fects in the materials and are c., are ıа suitable substrate prior to the application responsibility of Central States. To minimize -ام Loc Plus. Substructures shoulc substrate, use Retroease esignecŀet ons from an u⊦ all necessary code requirements. Jrean lumper is 124 Jurring strips. not recommended as moisture ca metal panels and cause fasteners to buen but.

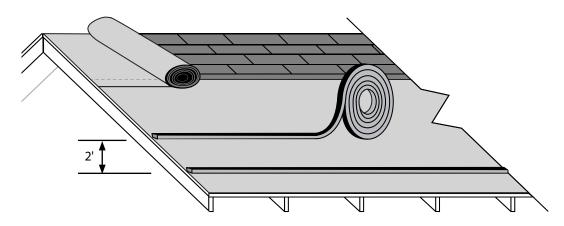

EXISTING SHINGLES


- 1. Make sure any existing decking is smooth, level and in good condition.

 Remove any damaged shingles or debris that might interfere with installation.
- 2. Apply 30 lb. felt or synthetic underlayment using nails or staples.
- 3. Apply 1x4 furring strips or Retroease horizontally, every 2' on center. These strips will act as purlin framing that you will fasten panels to.
- 4. Check for roof squareness. Follow guidelines on page 10.
- 5. Begin installation of trim and panels following guidelines on pages 12-13.




Check local codes when installing metal roofing over existing shingles. It is not recommended to install over more than 2 layers of shingles. Shingles may rot between layers due to trapped moisture, or substructure may fail due to weight of shingles and metal roof.

ROOF PREPARATION

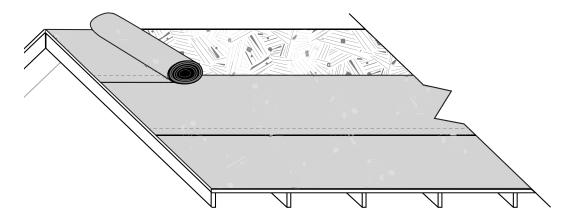

SOLID DECKING

- 1. Make sure decking is smooth, level and in good condition. Remove any debris that might interfere with installation.
- 2. Apply 30 lb. felt or synthetic underlayment using nails or staples.
- 3. Check for roof squareness. Follow guidelines on page 10.
- 4. Begin installation of trim and panels following guidelines on pages 12-13.

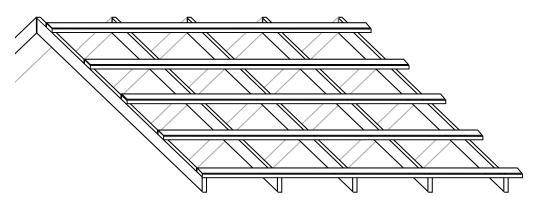

OPEN FRAMING

Panel-Loc Plus can be install directly over purlins/wood framing. Maximum purlin spacing is 2. This method should only be used for heated spaces if adequate protection against condensation is used. Without this protection, the underside of the paner may collection and ion and into structure.

- 1. Check for roof squareness. Follow guidelines on page 10.
- 2. Begin installation of trim and panels following guidelines on pages 12-13.

SUBSTRUCTURE SQUARENESS

The installer should check the roof deck for squareness before installation. Panel distortion may occur if not applied over properly aligned and uniform substructure. Several methods can be used to verify squareness of the structure for proper installation of the panels.


If the structure is out of square, you can use the 3-4-5 triangle method to create an alignment line to start your first run of panels.



Correct any squareness issues as early in the installation as possible. It might not appear to be a problem at the beginning, but if left uncorrected it will be very noticeable in the end.


OVERVIEW


The main goal is to create a triangle with sides that are 3', 4' and 5'. When this is accomplished you know you have a right angle at the eave to rake and can create an alignment line that is square.

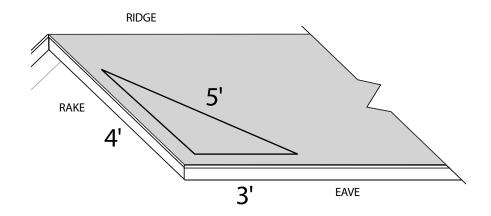

STEP 1

- 1. Starting at the eave and 1/2" from the rake, place a nail at POINT A
- 2. From POINT A, measure over 3' parallel with the eave and place a nail at POINT B.

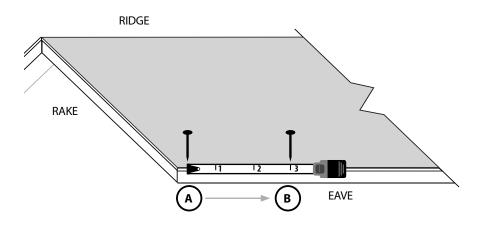

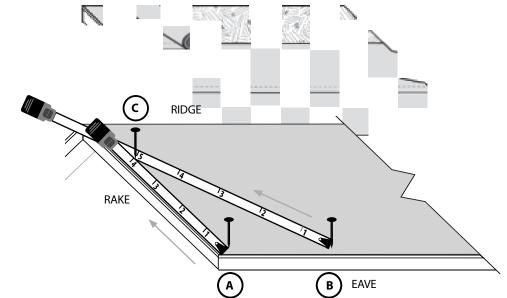


STEP 2

- 3. Hook one tape measure to POINT A and run it up the rake, approximately 4' towards the ridge.
- 4. Hook a second tape measure to POINT B and run it diagonal towards the first tape measure to approximately 5'.
- 5. Mark POINT C with a nail where tape measure one at 4' meets tape measure two at 5'.

STEP 3

- Snap a chalk line from the nails at POINT A and POINT C. This is your alignment line to start your first panel on.
- 7. Additional reference lines can be marked ahead of panel installation by snapping a parallel line 10' from your first line. Then as panels are installed you can measure points at the eave and ridge against this second line to see if the panels are still running square.

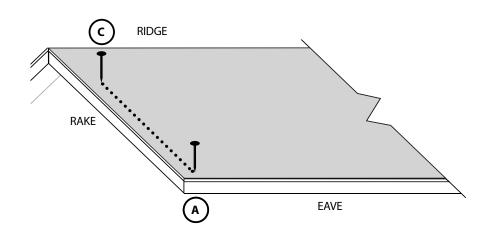


INSTALLATION OVERVIEW

Installation order will vary from roof to roof. Recommended installation of Panel-Loc Plus is shown below. The contractor will determine which conditions apply.




MOISTURE BARRIER


NOTE: Install any additional ice and water shield in valleys if appropriate at this time.




FASCIA TRIM




EAVE TRIM



VALLEY TRIM




PANELS




GAMBREL TRIMS



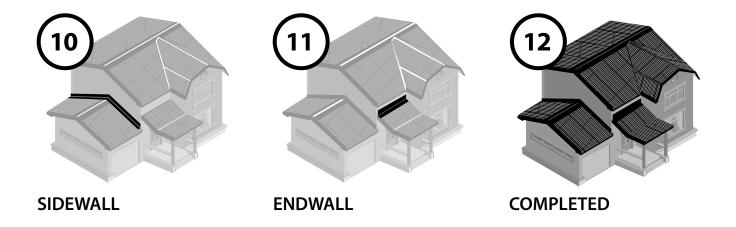

INSTALLING THE FIRST PANEL

Panels should be installed in the correct sequence as shown on pages 12-13. Install panels with the sidelap facing away from the prevailing wind.

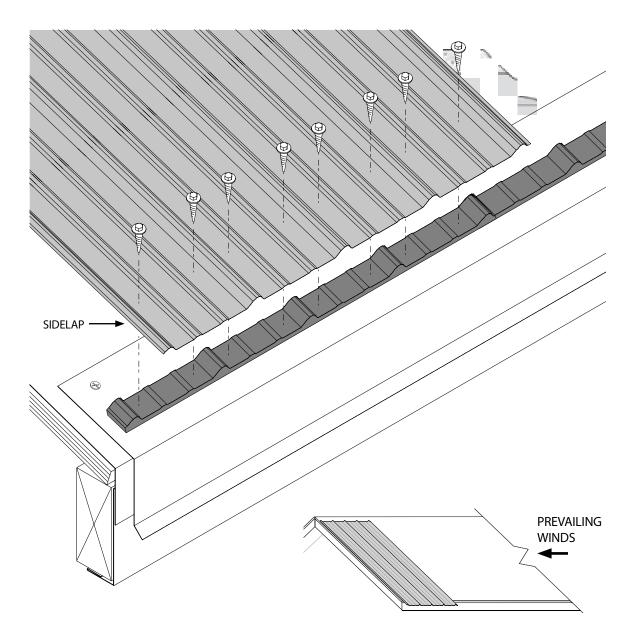





Copper metallic panels must be installed in the same direction! See directional arrows or stickers provided with your metal panel order.

- 1. Start the first panel at the alignment line you created on page 11.
- The panel should overhang from the eave a desired amount. If installing gutters, a 1" overhang is suggested.
 An overhang of 6" or more may not support weight of snow or debris.
- 3. Fasten at the eave according to the fastener pattern below. The fasteners should penetrate through the inside closure, through the eave trim and into the substrate below.
- Continue by fastening the panel every 2' running towards the ridge.
 Use the interior panel fastener pattern.
- 5. Continue with panel run using sidelaps. If necessary use an endlap condition shown on page 17.


ALIGNMENT LINE

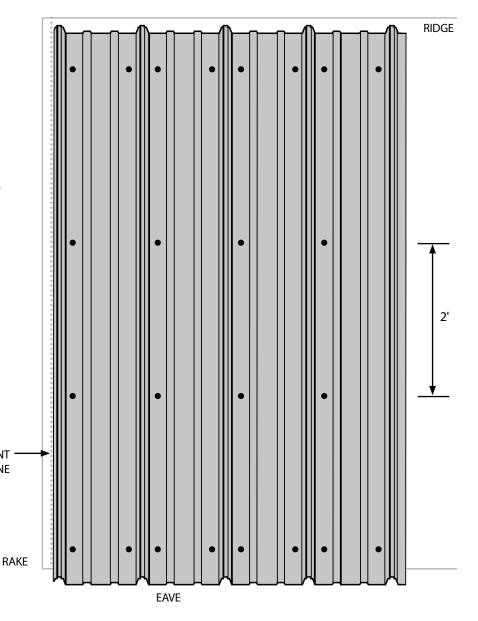

Fastener pattern at panel termination (Eave, endlap, valley)




Fastener pattern at interior of panel



 $Fastener\ spacing\ for\ Panel-Loc\ or\ CD2000\ can\ be\ found\ in\ product\ guides\ at\ central states mfg.com.$

INSTALLING SIDELAP PANEL

After the first panel is secure, proceed with the next panel by overlapping it on the side. Continue with fastener pattern shown on page 15.

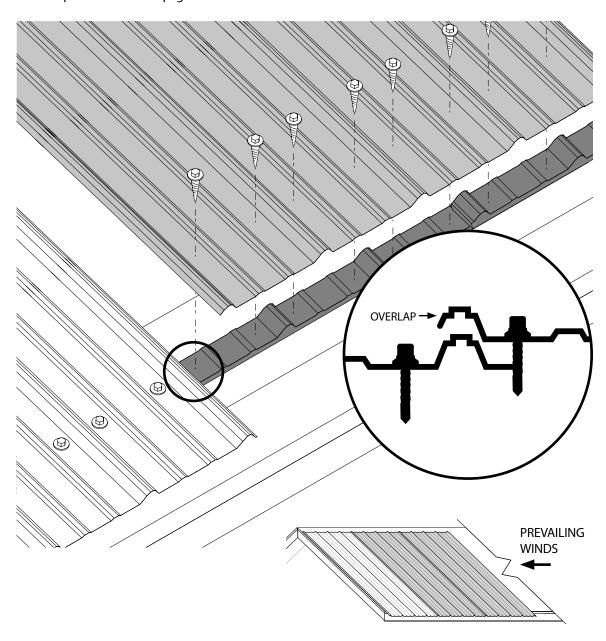




Do not damage the siphon groove by using a stitch screw on top of the major rib or clog it with butyl tape.


INSTALLING ENDLAP PANEL


This application may not be required.

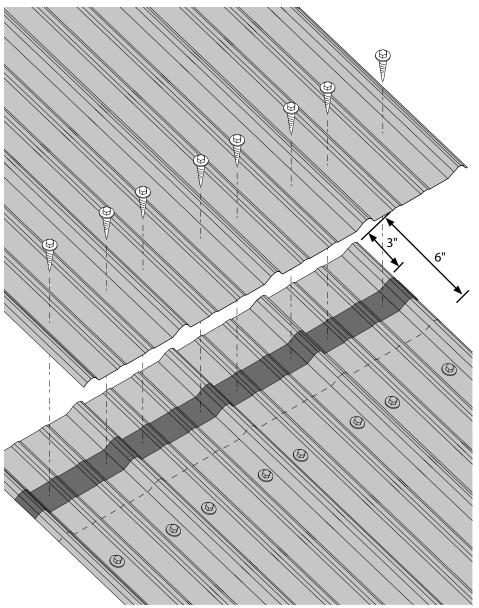

- 1. Starting at 3" from the end of the panel to be lapped, apply a line of butyl tape over the ribs.
- 2. Overlap the next panel 6".
- 3. Fasten the two panels together through the butyl tape and into the substrate below. This should be about 3" back from the overlapping panel.
- Continue by fastening the panel every 2' running towards the ridge. Use the interior panel fastener pattern.

RESIDENTIAL FASCIA TRIM

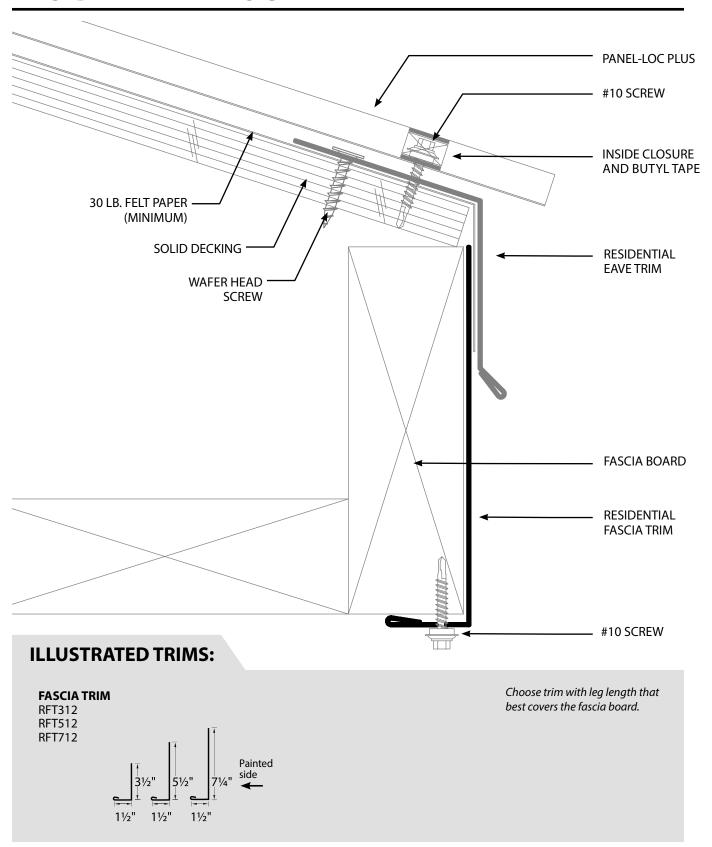


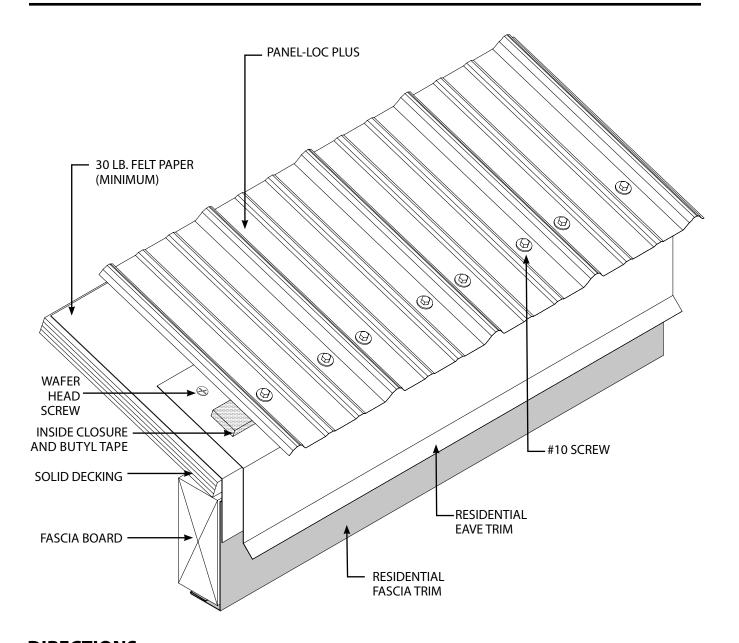


- 1. Choose a RFT with a leg length that best covers the fascia board.
- 2. Place RFT at fascia board and make sure roof felt overlaps RFT.
- 3. Fasten RFT to bottom of fascia board at 24" on center.
- 4. Continue by installing either Residential Drip Edge or Residential Eave Trim.

RESIDENTIAL DRIP EDGE

NOTE: Residential Drip Edge is not recommended when using seamless gutters. Choose Residential Eave Trim instead.

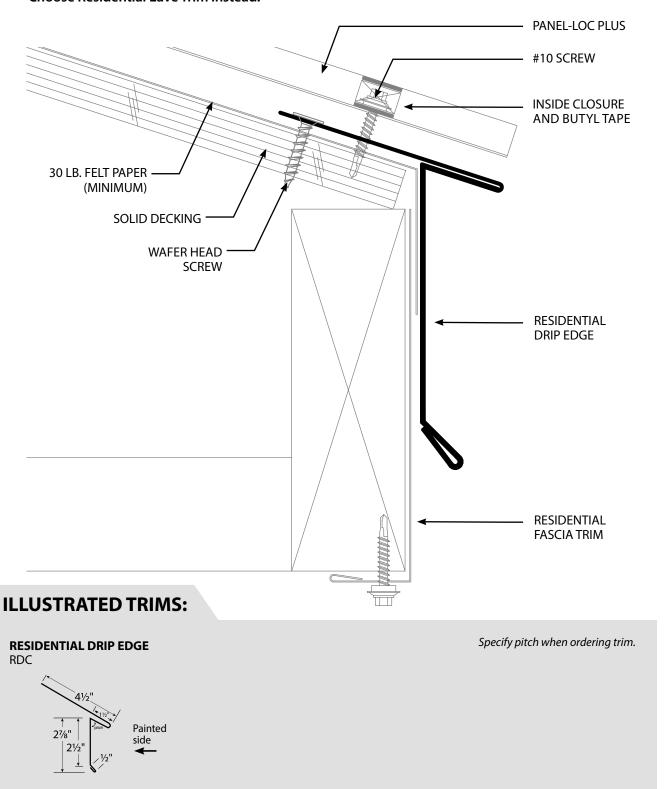


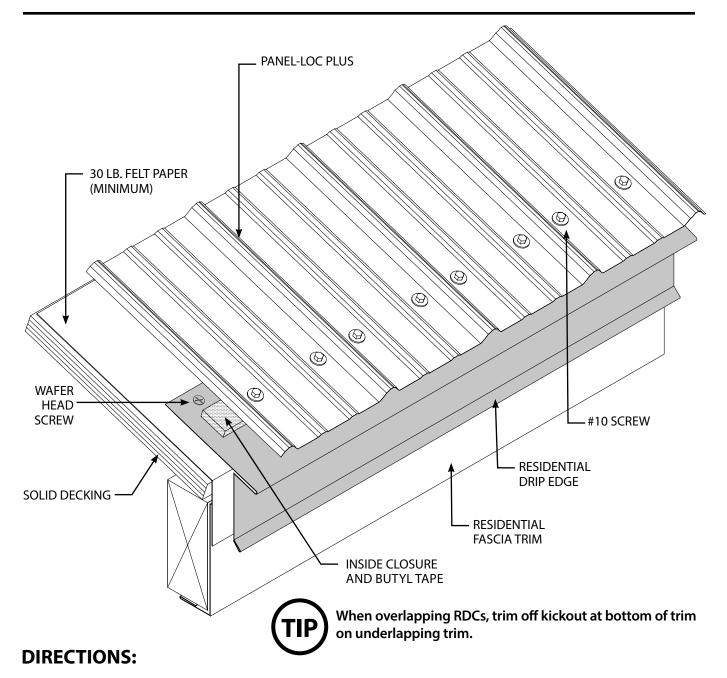


- 1. Fasten the RDC to the roof deck as shown with appropriate fastener. Fastener spacing is not important because the panel will fasten through the trim in a later step. Wafer head screws are recommended for this portion of application. If you are using a hex-head screw, fasteners should be placed appropriately to be hidden under the panel rib. Fasteners should be placed no more than .75" from the top of trim to allow for closure placement in later step.
- Place a run of butyl tape directly between edge of fastener and edge of roof. Then install inside closure on top of the butyl tape. Place another run of tape on top of inside closure.
- 3. Place panel on roof, aligning with inside closure. The edge of the panel should be aligned with the edge of the RDC overhanging the fascia.
- 4. Fasten panel according to fastener pattern, fastening through the closure, into the roof.

RESIDENTIAL EAVE TRIM


NOTE: Use with seamless gutters applications.

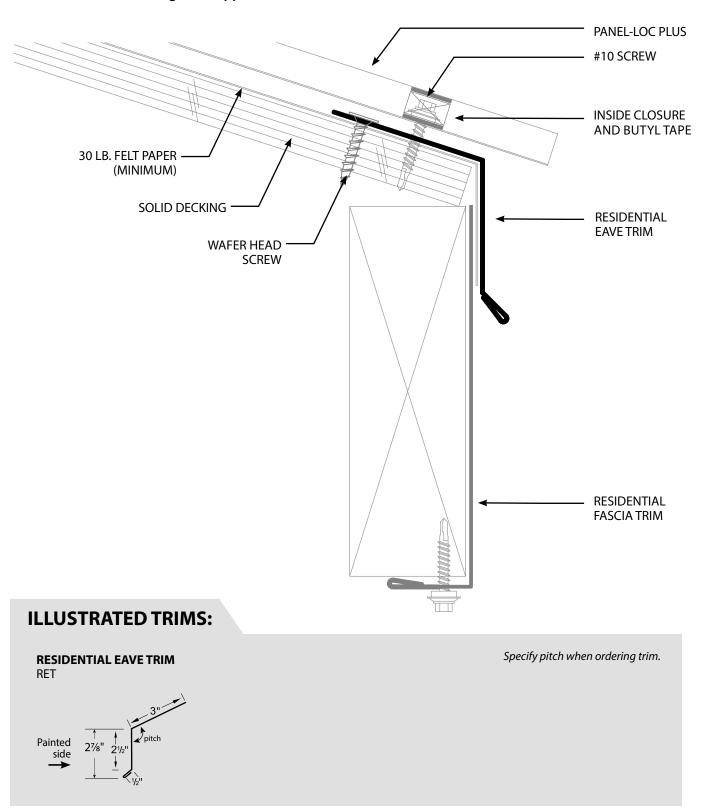

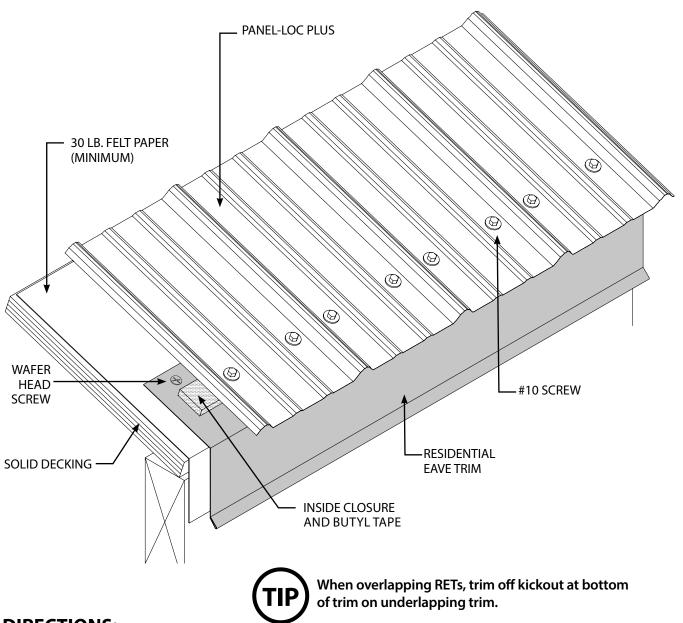


- 1. Fasten the RET to the roof deck as shown with appropriate fastener. Fastener spacing is not important because the panel will fasten through the trim in a later step. Wafer head screws are recommended for this portion of application. If you are using a hexhead screw, fasteners should be placed appropriately to be hidden under the panel rib. Fasteners should be placed no more than .75" from the top of trim to allow for closure placement in later step.
- Place a run of butyl tape directly between edge of fastener and edge of roof. Then install inside closure on top of the butyl tape. Place another run of tape on top of inside closure.
- 3. Place panel on roof, aligning with inside closure. The edge of the panel should be placed at the desired overhang of the fascia.
- 4. Fasten panel according to fastener pattern, fastening through the closure, into the roof.

VALLEY TRIM

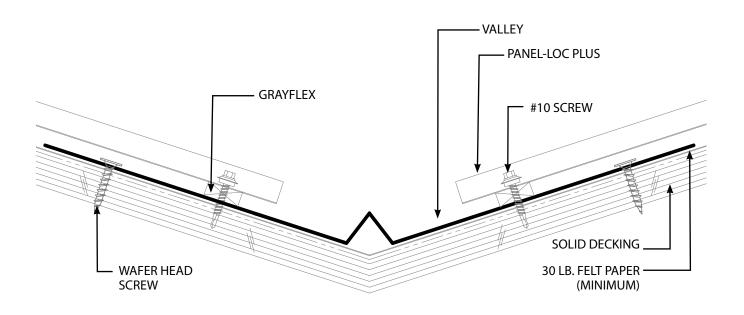




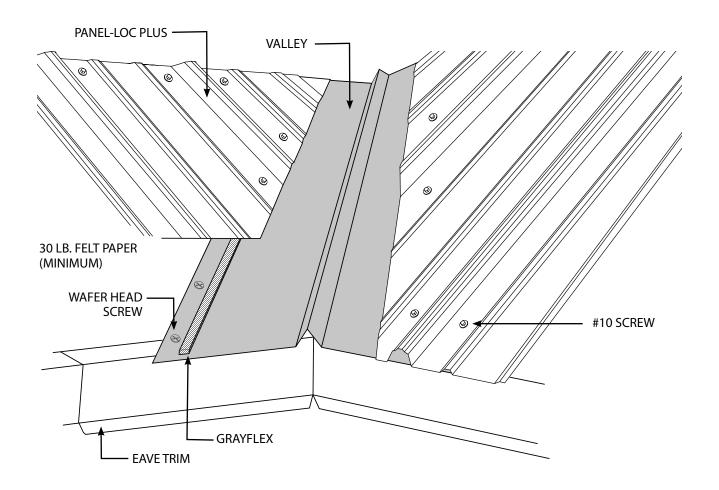

- 1. Place the VT1 into the valley of the roof so that both sides sit flat on the roof decking.

 4. The VT1 should be fastened to the roof deck no more than 2" from the outer edges. Place enough fasteners
- 2. Prior to fastening the VT1, the lower end must be cut to line up with the edge of the roof sections.
- 3. In most cases the top end of the VT1 will meet another VT1 coming from the other side of the roof section. The upper ends of each piece will need to be trimmed so that they can be overlapped.
- 4. The VT1 should be fastened to the roof deck no more than 2" from the outer edges. Place enough fasteners to secure VT1 until roof panel is applied. Wafer head screws are recommended for this portion of application. If you are using a hex-head screw, fasteners should be placed appropriately to be hidden under the panel rib.
- 5. Grayflex expandable foam is the recommended closure for valley installations.
- 6. When installing panels in a valley, the lower end of the panels should stop 3-4 inches from the center of the valley. Use endlap fastener pattern.

GAMBREL TRIM LOWER (TRANSITION TRIM)

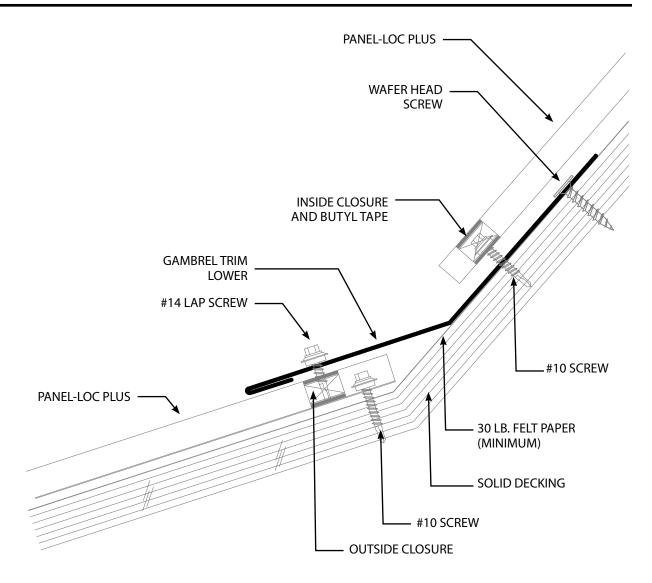





Always overlap Gambrel Lower trims the length of two ribs to reduce a wavy appearance.

ILLUSTRATED TRIMS:

GAMBREL TRIM LOWERGTL



Specify top and bottom pitch when ordering trim.

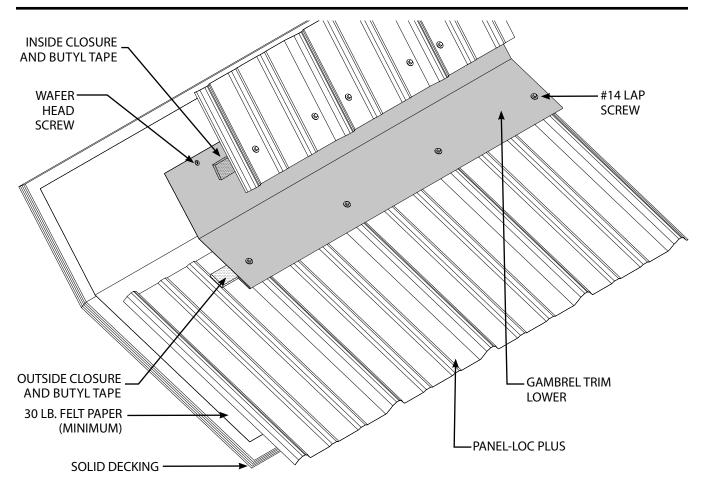


Be careful to not press down hard on unhemmed leg of GTL when fastening.

This could create a bend that might trap water.



- The lower section of the roof transition with panels must be installed prior to installation of the GTL. Place outside closure near the upper end of the lower roof panel where the transition trim will go.
- 2. Place the GTL uphill until the top leg (unhemmed leg) rests against the upper section of roof decking and the bottom leg sits on the lower panel.
- Fasten the GTL through the closure into the lower panel section through each rib along the length of the trim. Lap screws are recommended for this portion of application.
- 4. The upper leg of the GTL should be fastened 1" from the top of the trim into the roof decking. Placing the fastener closer to the bend in the middle could impede later installation steps. Wafer head screws are recommended for this portion of application. If you are using a hex-head screw, fasteners should be placed appropriately to be hidden under the panel rib.
- 5. Before installing upper panels, place a run of butyl tape along the length of the GTL approximately two inches up from the bend. Then install inside closure on top of butyl tape. Place another run of butyl tape on top of the inside closure.
- 6. Place the panel for the upper level of the transition, fastening through the closure into roof decking.

GAMBREL TRIM UPPER

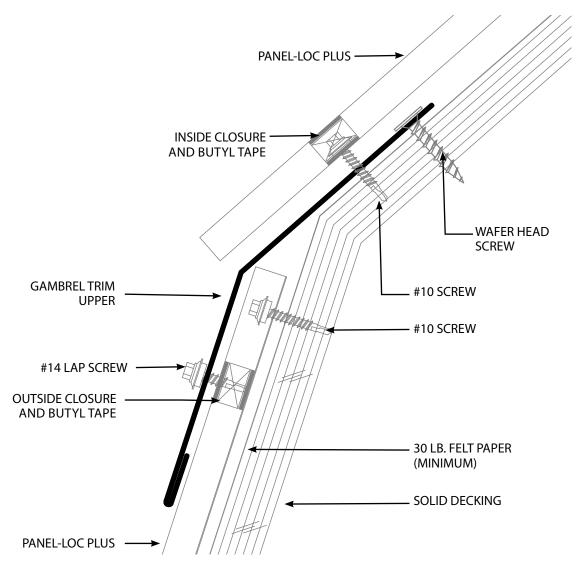




Always overlap Gambrel Lower trims the length of two ribs to reduce a wavy appearance.

ILLUSTRATED TRIMS:

GAMBREL TRIM UPPER GTU

Painted side


Specify top and bottom pitch when ordering trim.

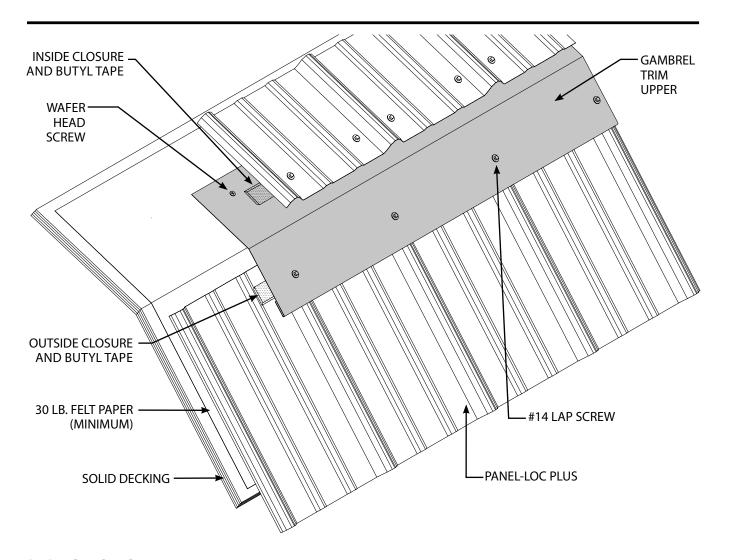


- 1. The lower section of the roof transition with must be installed prior to installation of the GTU.
- 2. Place a run of butyl tape near the upper end of the lower panel where the transition trim will go. Then install outside closure on top of butyl tape. Place another run of butyl tape on top of the outside closure.
- 3. Place the GTU uphill until the top leg (unhemmed) rests against the upper section of roof decking. The bottom leg should also rest against the bottom panel.
- 4. Use appropriate fastener to attach the GTU through the closure into the lower panel section through each rib along the length of the trim. Lap screws are recommended for this portion of application.
- 5. The upper leg of the GTU should be fastened 1" from


- the top of the trim into the roof decking. Placing the fastener closer to the bend in the middle could impede later installation steps. Wafer head screws are recommended for this portion of application. If you are using a hex-head screw, fasteners should be placed appropriately to be hidden under the panel rib.
- 6. Before installing upper panels, place a run of butyl tape along the length of the GTU approximately two inches up from the bend. Install outside closure on top of butyl tape. Place another run of butyl tape in top of outside closure.
- 7. Place the panel for the upper level of the transition.
- 8. Starting run of screws for the upper panel should fasten through the closure into roof decking.
- 9. Fasten the panel to the roof decking according to the fastener pattern.

RESIDENTIAL RAKE

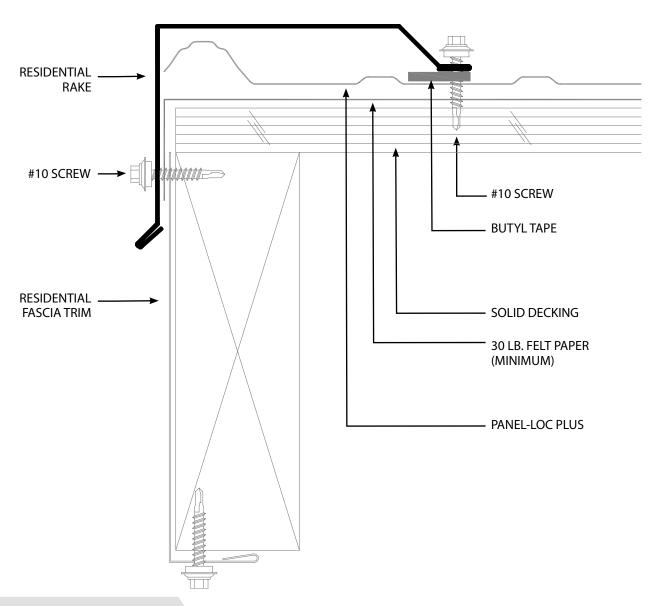


ILLUSTRATED TRIMS:

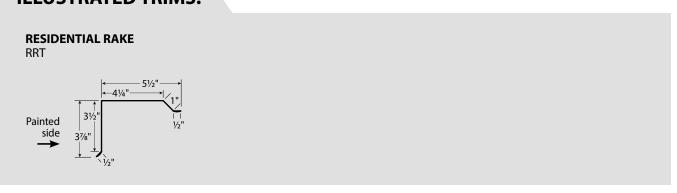

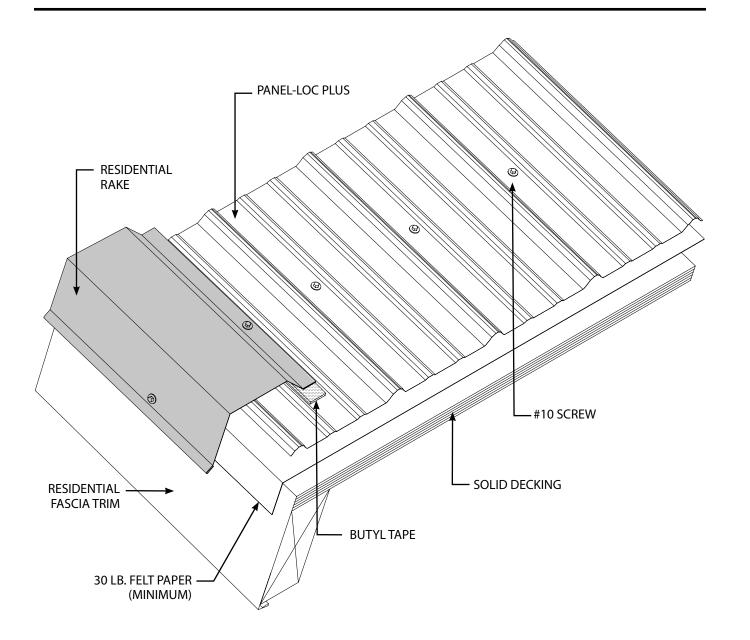


- 1. Install panel aligned with edge of roof.
- 2. Apply butyl tape to the leg of the RRT that will be fastened to the roof (the non-flat side). Extra width of butyl tape should be hidden inside the trim, rather than exposed to the weather. To apply, unroll butyl tape and stick to the trim. Leave backer on butyl tape until just prior to installation.
- 3. When ready to install the piece, peel the backer off of the butyl tape and align rake trim so that the face (flat side) of the RRT is against the fascia and the top of the RRT is at the same height as the panel rib.
- 4. Install fastener through the hem and butyl tape into the roof. Install another fastener into the face of the RRT and the fascia about an inch above the hem. Fasten the length of the trim following the fastener pattern established at panel installation.

RIDGE CAP

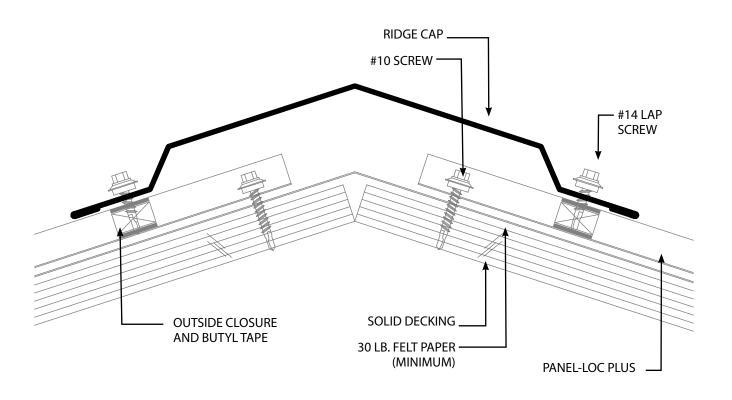




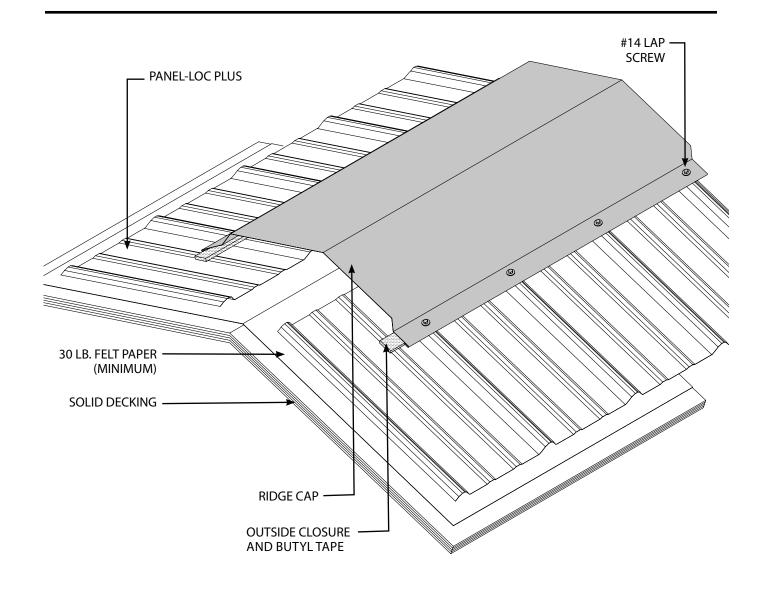



- Before installing the RCP, the roof panels should be properly installed up to the peak of the roof. There should be a closure under the upper edge of each side of roof panels.
- 2. Before placing the RCP, place butyl tape on each side of roof panel where you will install outside closures so that when fasteners are used to secure the RCP, they will go through the closure into the rib of the panel. Install outside closure and place another run of butyl tape on top of the outside closure.
- 3. Place the RCP make sure the center of the ridge cap is in line with the peak of the roof.
- 4. Fasten the RCP to the panel at each rib down the entire length of the ridge. Lap screws are recommended for this portion of application. Remember the fasteners should go through the line of closure.

SIDEWALL TRIM

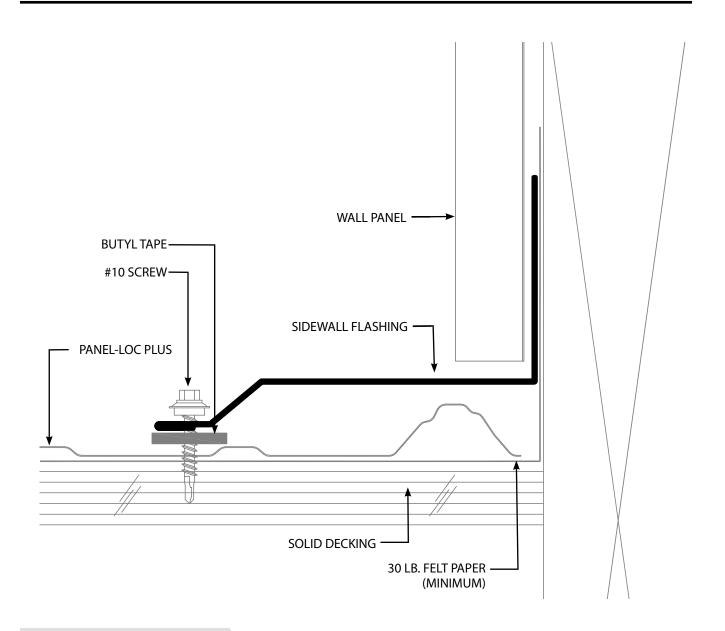


ILLUSTRATED TRIMS:

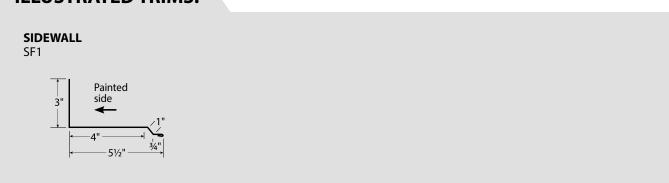

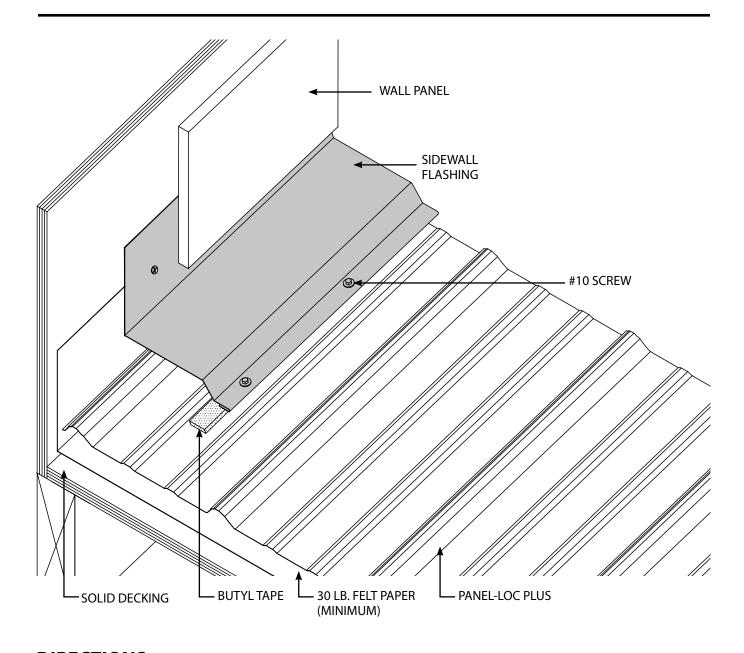


- 1. Roof panels must be installed prior to the installation of SF1.
- 2. Butyl tape should be placed along the entire length of the hemmed leg of the trim piece.
- 3. Place the SF1 so that the vertical, unhemmed leg is flat against the wall. It is recommended that this go behind outer wall coverings like siding if possible. Fasten if necessary. To avoid creating an area where
- rust could occur make sure cut edge of the wall panel is at least 1/4" away from the sidewall flashing.
- 4. Fasten the SF1 through the butyl tape, into the roof decking along the length of trim, following the fastener pattern established at panel installation.

ENDWALL FLASHING

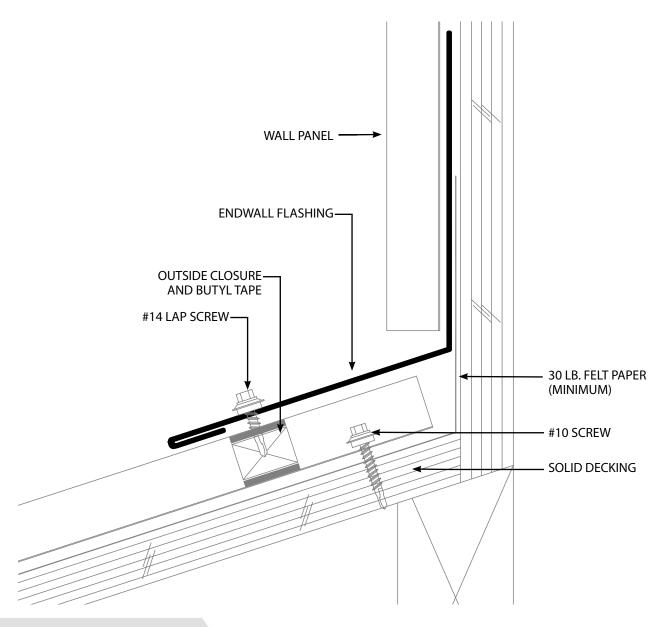

ILLUSTRATED TRIMS:



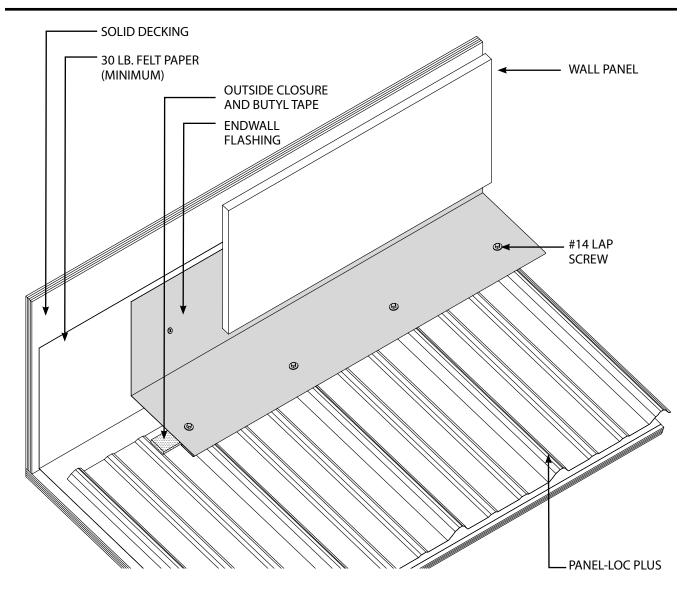



Always overlap Endwall Flashing trims the length of two ribs to reduce a wavy appearance.

- Roof panels must be installed prior to the installation of EFF.
- 2. Place a run of butyl tape along the entire length of the hemmed leg of the trim piece. Install outside closure on top of butyl tape and place another run of butyl tape on top of the outside closure.
- 3. Place the EFF so that the vertical, unhemmed leg is flat against the wall. It is recommended that this go behind outer wall coverings like siding if possible. To
- avoid creating an area where rust could occur make sure cut edge of the wall panel is at least 1/4" away from the endwall flashing.
- 4. Fasten the EFF trim through the closure, into the roof decking along the length of trim, at each rib in the roof panel. Lap screws are recommended for this portion of the application.

NOTES:	



Right. On Time. Every Time.

${\bf central} states {\bf mfg}.com$